




ACCROPODE™ II

"Technology, experience and cost-effectiveness condensed into a single armour unit"

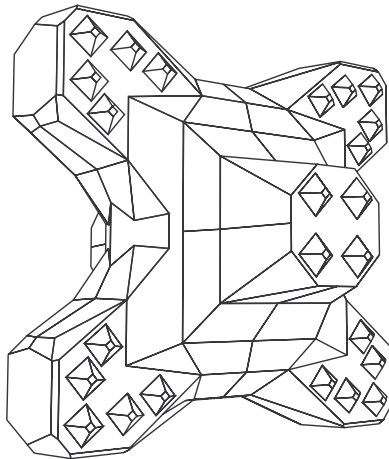

"Sharing skills and experience to achieve successful projects"

ACCROPODE™ II

Single-layer system for breakwater armouring

Background

The pioneer in single-layer technology, the ACCROPODE™ technique has become the benchmark for modern breakwater armouring. Feedback from extensive experience on a substantial number of single-layer projects has led to the refinement of the original concept and design. A new armour unit, the ACCROPODE™ II has been patented by Sogreah (ARTELIA) in 1999, further improving the practical use and cost-effectiveness.

Enhanced hydraulic performance

The optimised shape, and roughening by means of pyramids acting as friction enhancers on the faces of these armour units, increase ACCROPODE™ II interlocking, while new features include:

- minimised rocking and settlement,
- maximised energy dissipation,
- reduced wave reflection and run-up/overtopping,
- improved structural strength.

During the design stage, the stability coefficients are selected as a function of the achievable packing density on site.

The standard Hudson's design KD values for breaking or non-breaking wave conditions are:

- 16 on breakwater trunk sections
- 12.3 on breakwater roundheads

Alternatively, the recommended Van der Meer stability number is:

$$N_S = H_S / (\Delta D_{n50}) = 2.8$$

where

H_S = Significant wave height


Δ = Relative mass density

D_{n50} = Nominal diameter

These coefficients are valid for armour slopes from 3H/2V to 4H/3V. However for breaking waves and a seabed slope greater than 1%, lower values shall apply.



3D tests

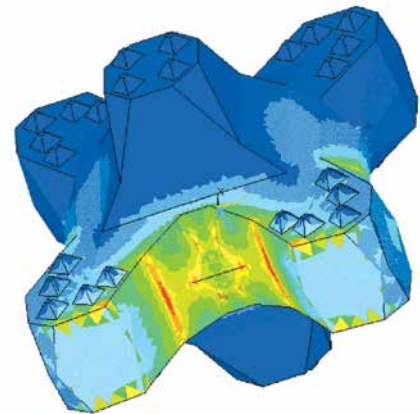

Stress contours

Improved structural robustness

Comparative finite-element studies have demonstrated that the ACCROPODE™ II unit has improved robustness compared with the first-generation ACCROPODE™, which in itself is recognized worldwide for its excellent records and reputation.

Concrete strength specifications for placing the units

	Min. compressive strength F _c at 28 days	Min. tensile strength F _t at 28 days
Unit volume ≤ 4.0 m ³	25 MPa	2.5 MPa
Unit volume > 4.0 m ³	30 MPa	3.0 MPa



Striking operation



Mould ready for casting



Reliable, easy formwork

- Two symmetrical steel shells
- No base plates required
- Quick-assembly bolting system
- Ease of stripping and reassembly

Simple casting

- Min. area required to cast one unit of height H : **$1.55H^2$**
- Min. compressive concrete strength recommended at stripping: 6 MPa for units $\leq 4 \text{ m}^3$, 7 MPa between 5 m^3 and 15 m^3 , 10 MPa for sizes $> 15 \text{ m}^3$
- Typical daily standard production rate: one unit per mould

Safe storage and handling by crane or forklift

- Units can be stored one on top of the other or nested on one or more levels, provided that ground conditions are suitable
- Min. area required to store 10 units on 1 level: **$7.1H^2$**
where $H = \text{ACCROPODE}^{\text{TM}} \text{ II unit height}$
- Min. compressive concrete strength recommended for handling units: 15 MPa for units $\leq 4 \text{ m}^3$, 20 MPa between 5 m^3 and 15 m^3 , 25 MPa for sizes $> 15 \text{ m}^3$

Simplified placement

The new ACCROPODETM II shape enables units to be placed more rapidly on site using simple rules, since the random attitude of each unit is naturally obtained, with the theoretical grid shown on the placement drawings and allowing reliable QA/QC procedures.

Proper packing provides adequate coverage on breakwater slope: $\frac{N_a}{A} = \phi V_{\text{accrII}}^{-2/3}$

where

N_a = Number of armour units


A = Unit area of breakwater slope

ϕ = Packing density


V_{accrII} = ACCROPODETM II unit volume



Transport by barge

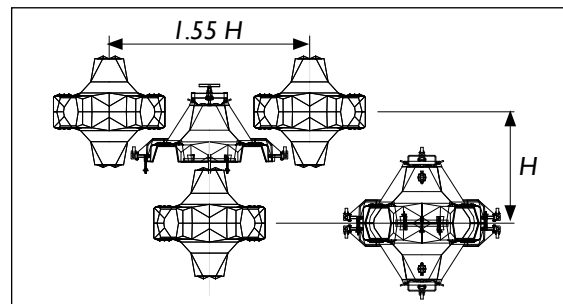

Plan layout of casting arrangement

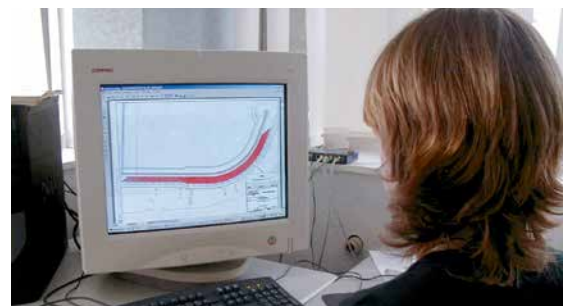

Drafting of positioning drawings

Placement rates (using cable cranes)

	Average placing time per unit
$1.0 \text{ m}^3 \leq \text{Unit volume} \leq 3.0 \text{ m}^3$	4 to 6 mins
$4.0 \text{ m}^3 \leq \text{Unit volume} \leq 8.0 \text{ m}^3$	7 to 10 mins
$\text{Unit volume} \geq 11.0 \text{ m}^3$	10 to 20 mins

NB: higher rates can be obtained using hydraulic placing equipment with small size units.



Placement using a floating crane



ACCROPODE™ II projects investigated or built in:

- Angola
- Cyprus
- FRANCE
- India
- Italy
- Mauritius
- Morocco
- Polynesia
- South Korea
- Sri Lanka
- Uruguay



CLI Head office

4, rue Germaine Veyret - Verner
38130 Echirolles
FRANCE
Tel. +33 (0)4 76 04 47 74
Email: cli@concretelayer.com
Website: www.concretelayer.com



ACCROPODE™ II is a registered trademark of ARTELIA Eau & Environnement
ACCROPODE™ II armor units are protected by patents worldwide
CLI is the licensee of ARTELIA Eau & Environnement